


1st Class Hydrolytic Neutral Glass Ampoule

ampoule specification

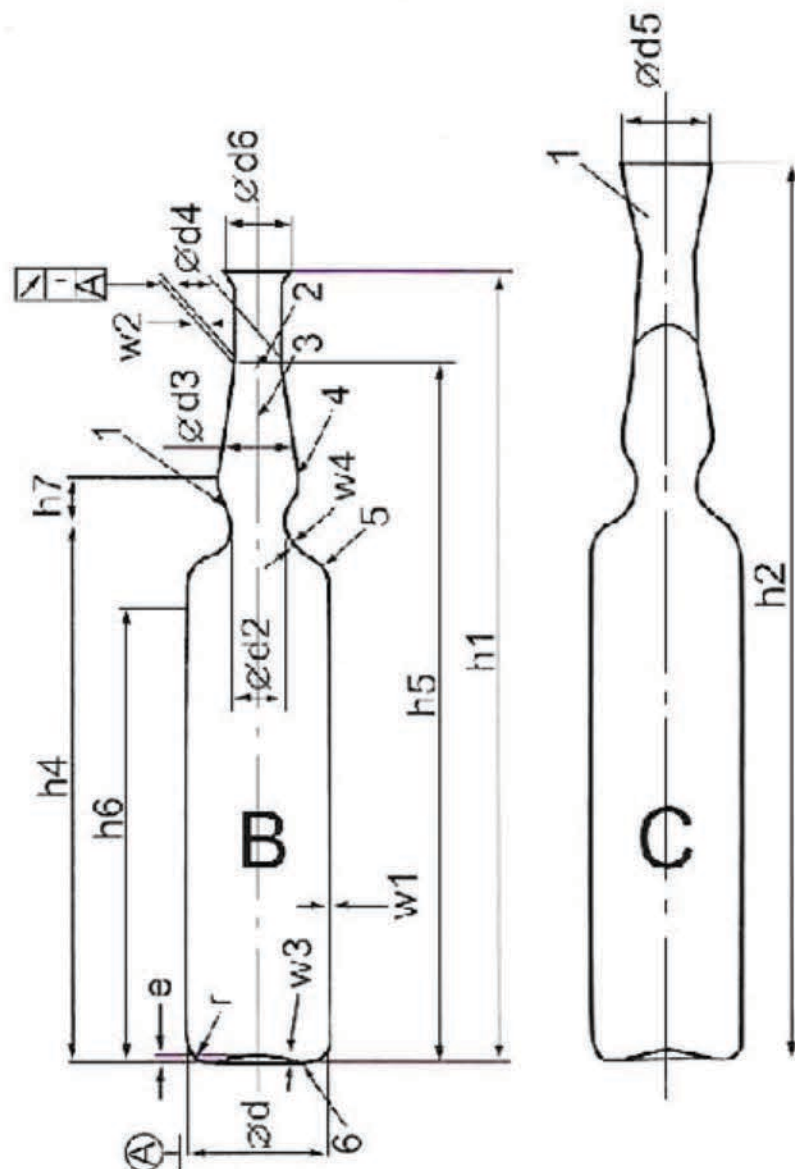

Nominal volume	Body		Const- riction	Bulb		Stem		Funnel		Funnel	FORM B		FORM C	
ml	d1		d2	d3		d4		d5		d6	h1		h2	
	nom	tol	± 0,50	nom	tol	nom	tol	nom	tol	± 1	nom	tol	nom	tol
1	10,75	± 0,15	6,5	8,5	± 0,50	6	± 0,35	9	± 0,80	8	60	± 0,5	67	± 1
2	10,75		6,5								72		79	
3	12,75		6,5								75		82	
5	14,75	± 0,20	7	9	± 0,50	7	± 0,35	12,2	± 1	9	83	± 0,5	90	± 1
10	17,75		7,5								9,5		109	
20	22,6		8,5								11		120	
		± 0,25					± 0,50				113	± 1		± 1,5

Nominal volume	To constriction		To gauging point	Body height	Centre of constriction to bulb	Radius	Depth of base		Body		Stem at gauging	At base
ml	h4		h5	h6	h7	r	e		w1		w2	w3
	nom	tol	± 2	Min.	Max.	± 0,50	nom	tol	nom	tol	± 0,05	Min.
1	25,5	± 0,50	47	21	4,5	1	1	± 0,50	0,5	± 0,03	0,37	± 0,30
2	37,5		57	33								
3	39,5		62	35								
5	46,5	± 1	68	41	5,5	1,5	1,25	± 0,75	0,55	± 0,04	0,42	± 0,40
10	82		87	55								
20	78		100	55								
		± 1,3			6,5	2,5	1,5	± 1	0,7		0,55	± 0,50

Nominal volume	At constriction		Circular runout tol.	Volumn to centre constriction
ml	w4		t	v
	nom	tol	Max.	Approx.
1	0,7	± 0,1	0,6	1,5
2				2,3
3				3,5
5	0,8	± 0,15	1	6,5
10				11,5
20				23,5
	1	± 0,2	1,2	